



Cinemango 100

USER MANUAL

Please read this manual thoroughly before using and keep it for future reference.

ENGLISH



PACKING LIST



Cinemango 100




Remote




Carrying Bag




User Manual



AV Cable




HD Cable




Power Cable

NOTICE





Recommended

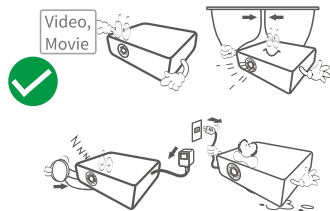


NOT Recommended

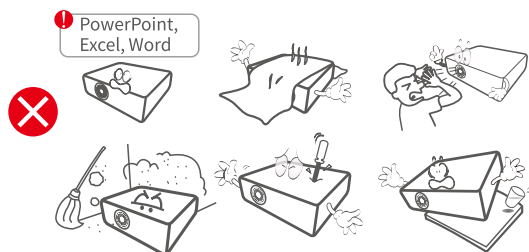


FUNCTION OVERVIEW

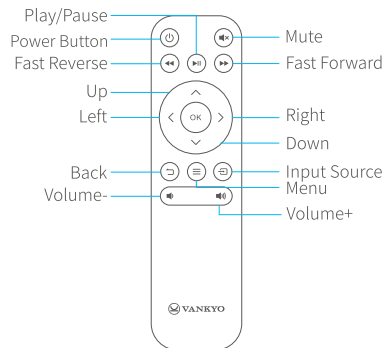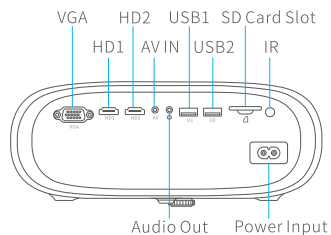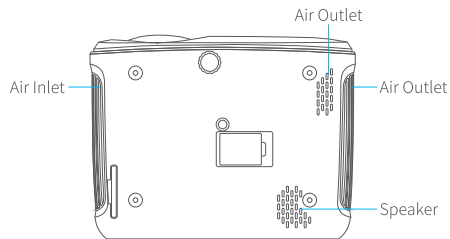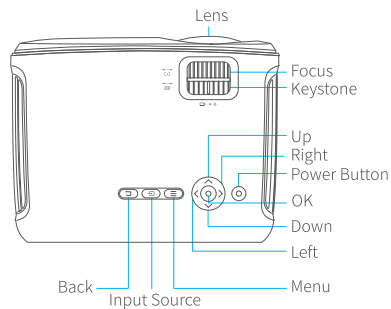


QUICK START




Plug the power cord into an outlet.




Take off the lens cover.




Press the **Power Button** to turn on the projector.




Select the correct input source by pressing the  button.

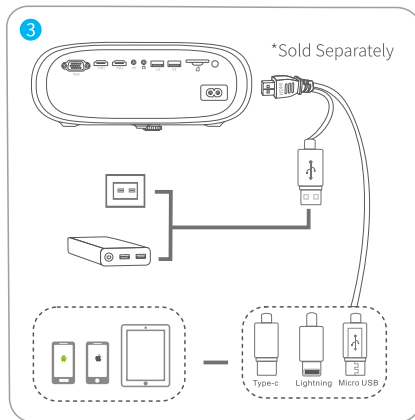


Connect your device to the projector correctly.



Adjust the kickstand accordingly.

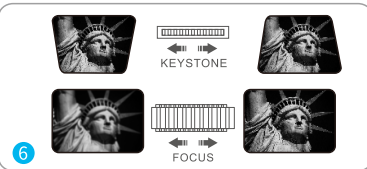

Adjust the keystone and focus ring to get the best image performance.




Press the **Power Button** twice to turn off the projector.

INPUT SOURCE


Press  on the projector or remote to enter the interface of Input Source.

A. Multimedia Connection

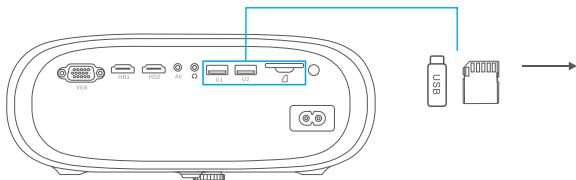


Input Source
AV
VGA
HD1
HD2
USB1
USB2
SD

B. HD Connection

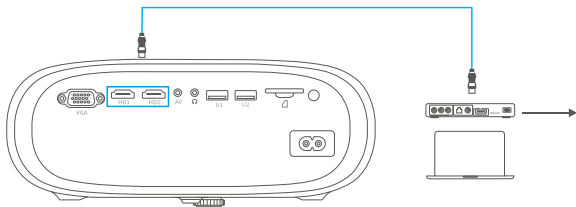


Input Source
AV
VGA
HD1
HD2
USB1
USB2
SD

C. VGA Connection

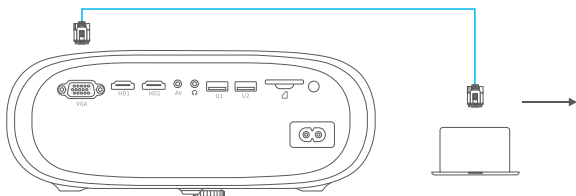


Input Source
AV
VGA
HD1
HD2
USB1
USB2
SD

PROJECTOR CONNECTION

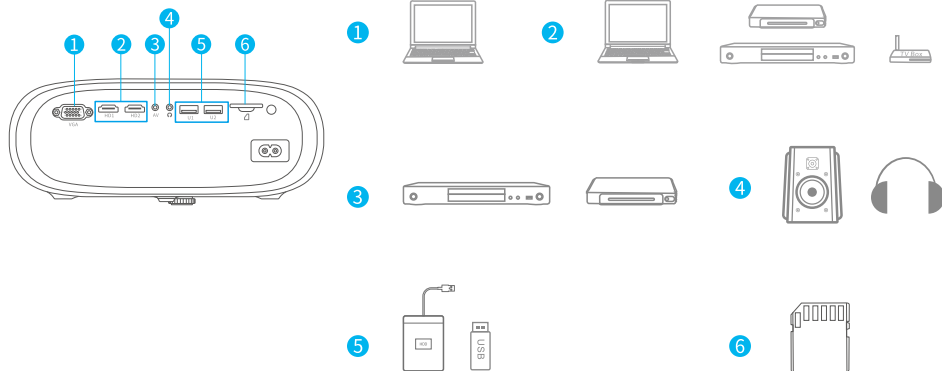

PROJECTION DISTANCE&SIZE

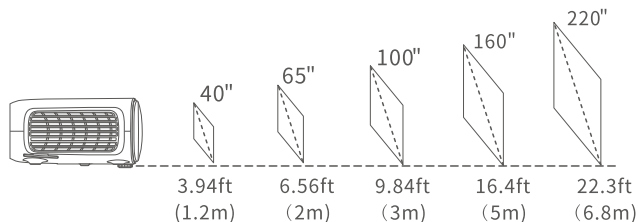

The recommended projection screen is around 100 inches with a distance of around 9.84ft. Ambient darkness will improve the clarity of the projected images.

SPECIFICATION

Display Technology	LCD	Light Source	LED
Resolution	Native 1280 x 720	Input Signal	480P、576i、576P、720i、720P、1080i、1080P
Installation Type	Front/Rear/Ceiling	Aspect Ratio	4:3/16:9/Auto
Focus	Manual	Keystone	±15°
Speaker	3W/4ohm	Power Supply	AC 100-240V, 50/60Hz
Unit Dimension	9.25 x 7.09 x 3.66in (235 x 180 x 93mm)	Unit Net Weight	3.08lb (1.4kg)
Photo Format Supported	BMP/JPG/JPEG/PNG/GIF	Audio Format Supported	MP2/MP3/PCM/FLAC/WMA/AAC
Video Format Supported	AVI/MP4/MKV/FLV/MOV/RMVB/ 3GP/MPEG1/MPEG2/H.264/XVID	Ports	VGA x 1/HD In x 2/AV In x 1/ Audio Out x 1/USB2.0 Port x 2/ SD Card Slot x 1
Mounting Screw	1/4"	Number of Screw	Not included

TROUBLESHOOTING GUIDE

1. Blurry Image

- * Adjust focus ring/keystone.
- * Projector and screen/wall must be in effective distance.

2. Remote Unresponsive

- * Make sure remote points at IR receiver directly.
- * Do not cover IR receiver.
- * Try a new pair of AAA batteries.

3. Mobile Connection

iOS: Genuine lightning to HDMI cable

Android: Micro USB to HDMI adapter/Type C to HDMI cable

4. UP Side Down Images

- * Go to **Menu > PICTURE > Projection Mode** to flip the projection image.

5. Adjust the Image Size

- * Go to **Menu > PICTURE > Reduce Image Size** to adjust the image size.

6. Auto Off

- * Go to **Menu > TIME > Auto-off Timer** to adjust the time period before the projector automatically turns off.

VANKYO SUPPORT



www.ivankyo.com



@VankyoOfficial



VANKYO



North America support@ivankyo.com

United Kingdom support.uk@ivankyo.com

Deutschland support.de@ivankyo.com

France support.fr@ivankyo.com

España support.es@ivankyo.com

Italia support.it@ivankyo.com

日本 support.jp@ivankyo.com